




• Installation (Unit : mm)

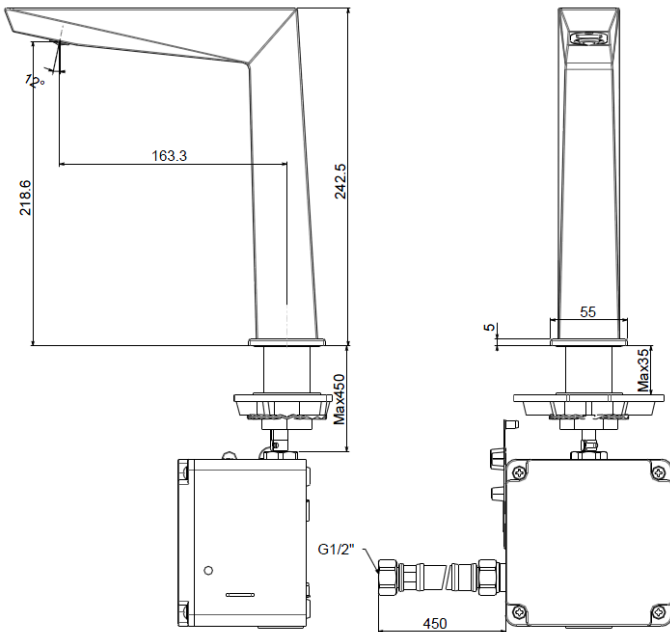

Sensor	Infrared Sensor
Power	DC 6V (4Pcs AA Alkaline Battery)
Valve	Solenoid Valve
Aerator	PCA Aerator
Inlet Hose	1200mm PVC Pipe and Clip
Water pressure	0.05MPa ~ 0.75MPa
Recommended pressure	0.1MPa ~ 0.5MPa
Flow rate	≤ 8L/Min at 1 bar
Body Material	Brass
Body Finish	Chrome plating

Detail parts: Sensor, Solenoid Valve, Control box
Body .

Inner Box size (mm) : 424*260*122

Carton size (mm) : 445*270*384

Q'ty / Box: 4pcs

Product weight : 3.5 Kg

Surface Treatment : Ni \geq 5.0u, Cr \geq 0.2u

1. Infrared sensor control, hands free to prevent germ infection
2. Sensor installed at the spout, it is convenient for customer when using
3. Blue Bird technological innovation , no error operation when the sensor face to the mirror
4. With PCA aerator, Water flow rate is more stable under high pressure and with air bubble
5. A safety delay close after 59 seconds of continuous water flow

