


• Installation (Unit : mm)

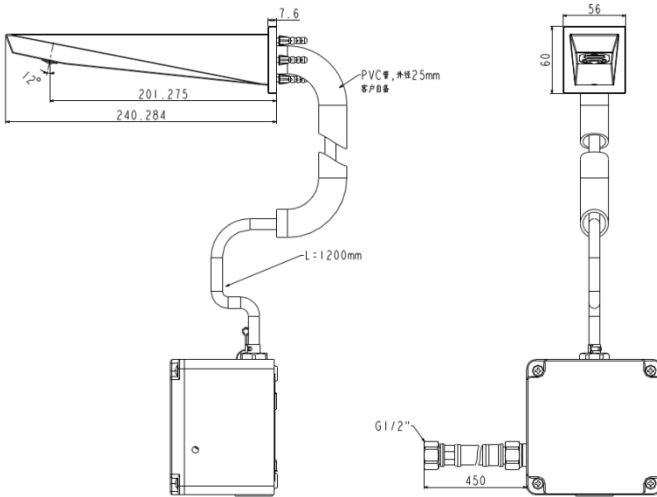

Sensor	Infrared Sensor
Power	DC 6V (4Pcs AA Alkaline Battery)
Valve	Solenoid Valve
Aerator	PCA Aerator
Inlet Hose	1200mm PVC Pipe and Clip
Water pressure	0.05MPa ~ 0.75MPa
Recommended pressure	0.1MPa ~ 0.5MPa
Flow rate	≤ 8L/Min at 1 bar
Body Material	Brass
Body Finish	Chrome plating
<p>Detail parts: Sensor, Solenoid Valve, Control box Body .</p> <p>Inner Box size (mm) : 424*260*122 Carton size (mm) : 445*270*384 Q'ty / Box: 6pcs Product weight : 2.2 Kg</p>	

Surface Treatment : Ni≥5.0u, Cr≥0.2u

1. Infrared sensor control, hands free to prevent germ infection
2. Sensor installed at the spout, it is convenient for customer when using
3. Blue Bird technological innovation , no error operation when the sensor face to the mirror
4. With PCA aerator, Water flow rate is more stable under high pressure and with air bubble
5. A safety delay close after 59 seconds of continuous water flow

