

American Standard



LYNBROOK

Integrated Wall Hung Urinal

LYNBROOK INTEGRATED WH
URINAL

American Standard



FEATURES & TECHNOLOGIES

LYNBROOK INTEGRATED WH URINAL



Contactless

Built in infra-red sensor activates flushing 2s after user leaves to provide a contactless and convenient experience

Stadium Mode

Flushes once every 2 minutes during high usage frequency for better water efficiency.

Auto-Clean

Flushes once after 24 continuous hours of non-usage

FEATURES & TECHNOLOGIES

LYNBROOK INTEGRATED WH URINAL



Water Saving


Spreader cleaning integrated within the specially designed internal curvature to achieve 0.5 litres of water per flush, thereby contributing to sustainability with every flush,

Hygiene Rim

Spreader flushing operates out of a water outlet as compared to channel flushing through a box rim gives no place for bacteria to hide and makes it easy to clean with contour area.


FEATURES & TECHNOLOGIES

LYNBROOK INTEGRATED WH URINAL




ComfortClean™

American Standard's anti-bacterial glazing technology on the inner surface to inhibit bacterial growth for a bacteria-free and hygienic restroom



Optimal Height

Height of 780mm caters to both adults and children, effectively eliminates the need to install separate child urinals which requires non-standard plumbing lines, thereby reducing complexities. The urinal installation is also ADA* compliant.




Easy Maintenance

Urinal's parts can be easily reached from the bottom, making it easy for maintenance. Installation is also now a breeze with everything easily accessible from one spot.

**Urinal can be installed with height of Lip less than 432mm, depth less than 510 mm and flush sensor height is less than 1120 mm*

FEATURES AT A GLANCE

LYNBROOK INTEGRATED WH URINAL

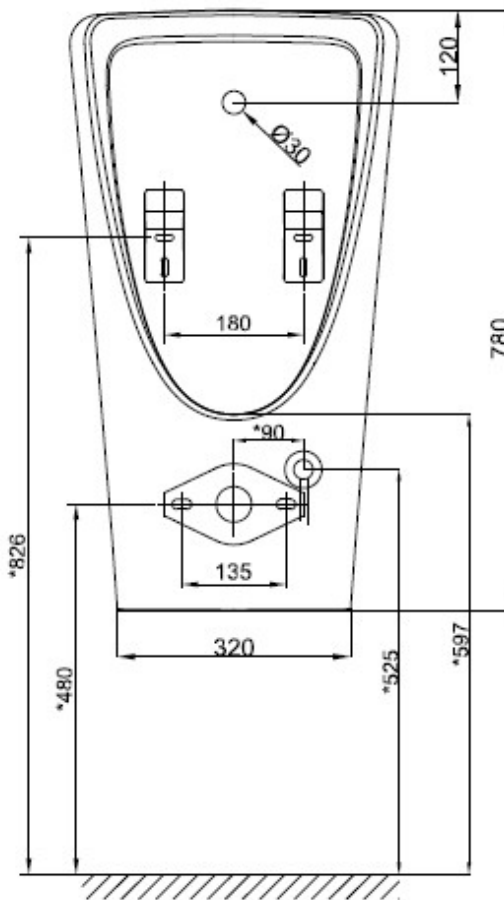

Specifications

CCAS65I9-3II04I0 - DC
CCAS65I9-32I04I0 - AC

Dimension H x W x P (mm)	780 x 425 x 372
Power Supply Versions	AC 100 – 240V 50/60 Hz DC 6V 4*AA Alkaline battery
Flush Volume	0.5 Litres per flush
Water Pressure	0.05 – 0.75 Mpa / 0.5 – 7.5 Bar
Sensing Distance (mm)	650 - 750
Auto Flush	24 hours
Stadium Mode	Yes
Country of Origin	China

American Standard

Raising The Standard